

Inspired by History...




Driven by Vision.

Sheer sonic superiority. That's one way to describe the SC-7S2. Sheer artistic expression. That's another way. Both are correct. But neither touches the whole truth. The SC-7S2 represents a major retune of our Reference Statement Control Amplifier. The best from Marantz just got better.

SC-7S2 Reference Preamp

Reference Preamplifier

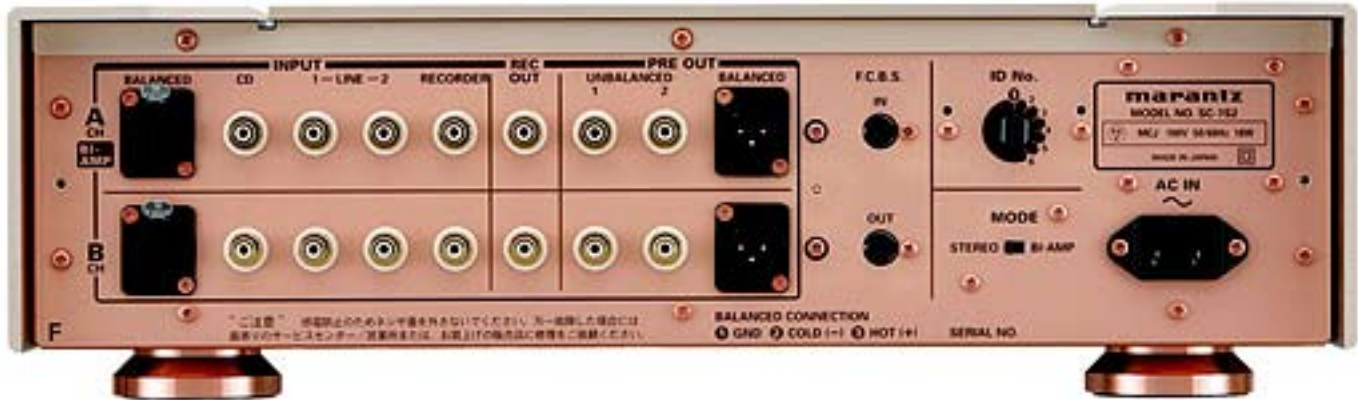

The SC-7S2 thoroughly updates the distinctive voice of the original Marantz Model 7 preamplifier and further improves on the acclaimed SC-7S1. This work of art defines new horizons in both musical performance and contemporary elegance. It is an enduring testament to the synergy of today's technologies with frequency response and channel separation far exceeding conventional requirements.

The SC-7S2 achieves these goals with a fully balanced current-feedback topology and a power supply based on a aluminum-encased toroid power transformer, Shottky barrier rectifier diodes, and low-ESR electrolytic storage capacitors for optimal power conditioning and distribution. Each input is fully buffered with Marantz-developed discrete circuitry for accurate signal transfer. Four Wolfson WM8816 high-precision multi-gang volume controls and 12 Marantz-proprietary HDAM-SA modules form an incredibly precise attenuation circuit fully capable of 0.5 dB resolution throughout its entire 100 dB range. Although the SC-7S2 is devoutly two-channel, it acknowledges multi-channel music with a floating bus (our F.C.B.S.) that allows you to control multiple units simultaneously for exciting multi-channel reproduction of any source.

The copper-plated aluminum chassis provides exceptional dimensional stability while copper and steel sub-members offer isolation from radio frequency (RF) and electromagnetic interferences (EMI). Adjustable muting and trim let you tailor the SC7S2 to your preferences. You can turn off the display to totally reduce potential distractions. And a Marantz system remote control lets you enjoy the SC7S2's exceptional performance from your favorite listening/viewing location.

FEATURES

Number of Channels	2
Output Power/Channel (20Hz - 20kHz) @ 8	1.7V
HDAM	• (HDAM SA)
Power Transformer	Toroidal
Discrete Amplifier Stage	•
Individual Level Adjust	•
Tone Control	-
Phono Input	-
Source Direct	•
Speaker A/B	•

IN/OUTPUTS

AUDIO	
Analog L&R In	1/3 (Balanced/Unbalanced)
Main Channel Amp In	
Bridge Mono Mode	• (Bi-Ampmode)
Analog L&R Out	2/1/1 (Balanced/Unbalanced/Rec Out)
Headphone Out	-
OTHERS	
D-Bus Remote (RC-5) In/Out	Marantz Floating Control Bus
External Control (RS232C)	-
AC Outlets (Switched/Unswitched)	-/-

SPECIFICATIONS

THD (20Hz - 20kHz, 8	0.0015% (Balanced)
Input Sensitivity/Impedance	420mV/20k
Frequency Response	3Hz - 150kHz (+0, -3 dB)
S/N Ratio	105 dB (Unbalanced)

GENERAL

Color	Gold
Front panel	Aluminum
Remote Control	Aluminum Top RC-7S1SC
Power Requirement	AC 120V 60Hz
Power Consumption	18W
Dimensions (Inches) W x H x D	18" x 7 1/2" x 17 1/2"
Weight (lbs.)	46.3

marantz®
LIFE AMPLIFIED™

*All specifications, dimensions and weights are subject to change without notice. D&M Holdings, Marantz, Marantz America, Inc. or any of its subsidiaries will not assume any liability for errors in this spec sheet which may result in consequential errors being made by retail dealers, designers, custom installers, cabinet makers or end users, etc based upon information contained within this document.