


Heard but not seen: In-Wall loudspeaker IW 1230



The in-wall loudspeaker for audiophiles!

Following in the tradition of the extremely popular ELAC 200 series, the IW 1230 In-Wall speaker features the same 140 mm aluminium sandwich woofer and JET ribbon tweeter all housed in a sealed in-wall enclosure. The IW 1230 offers exceptional detail and imaging, beautiful integration with traditional loudspeaker and with your décor.

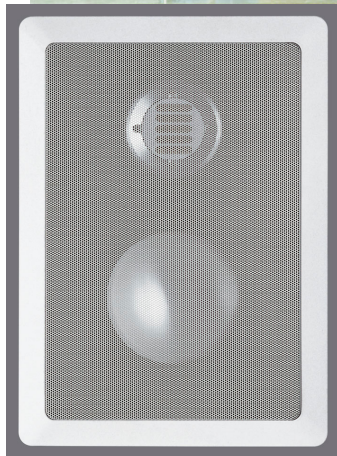

Technical features / benefits

- ELAC's JET III tweeter provides smooth detailed frequencies extending beyond 50 kHz
- Adjustable tweeter response switch (+/- 2 dB)
- shielded drivers for minimum magnetic interferences with video equipment
- arctic white grille and frame which are paintable to match your decor
- self-resetting overload protection prevents damage from accidental over-powering
- sealed enclosure optimizes bass response while minimizing dust build up internally
- tweeter level adjustment control
- accessories include an installation template and grill removal tool



Finishes: arctic white.

Specifications	IW 1230	Crossover frequency	3100 Hz
Dimensions HxWxD	308 x 220 x 105 / 115 mm	Nominal / Peak Power Handling	55 W / 80 W
Weight	approx. 3 kg	Frequency range	60 - 50000 Hz
Type	2-way, closed	Sensitivity	86 dB/2,8V/m
Woofer	1 x 140 mm AS cone	Nominal impedance	8 ohms
Tweeter	1 x JET III	Minimum impedance	6.1 ohms at 260 Hz
Recom. Amplifier Power at Nominal Impedance	30 - 150 W / channel		

ELAC

IW 1230

Product Information

